


 5959 Shallowford Road, Ste. 405  
Chattanooga, TN 37421  
 423.305.6151  
 SCPTech@spraylock.com  
 concreteprotection.com

**P3 Marine** is a spray-applied product, based on Spray-Lock Concrete Protection (SCP) colloidal silica technology, which provides a permanent improvement that increases the durability and life cycle of Portland cement concrete.

#### ABOUT THIS PRODUCT

P3 Marine is intended for use in areas where the concrete member is exposed to migration and diffusion of chlorides from saltwater, splash zones, potential liquid contaminants under hydrostatic pressure, regular and consistent exposure to detrimental conditions, or other similar severe sources of attack mechanisms.

P3 Marine penetrates into the accessible capillary system, reacting with the available free alkali found within, and primarily forming calcium silicate hydrate (C-S-H). It can be used at time of placement as the choice for curing and protection, or P3 Marine can be used on existing clean, hardened, permeable concrete.

P3 Marine technology was formulated to reduce the permeability of the concrete surface to reduce the impact of chloride and other salts as well as other contaminants into the concrete in a marine environment. With a superior cure (equal to or better than 28-day moist cure), the need for a curing membrane is eliminated, allowing foot traffic in just one to three hours.

P3 Marine provides permanent concrete protection while also providing improved conditions that allow concrete to become more durable and longer-lasting than untreated concrete. With over 40 years of industry proven performance, SCP technology is your solution to better concrete.



#### TYPICAL APPLICATION RATE

**Concrete**  
150 ft<sup>2</sup> per 1 gallon  
(3.7 m<sup>2</sup> per 1 liter)

#### Recommended Equipment for Applications

**Important:** When using an airless sprayer on freshly placed concrete, be sure to adjust pressure settings so that no surface damage occurs. The use of centrifugal pumps is not recommended.

Use a low to medium pressure sprayer complete with an extension wand and fan tip spray size of 0.019-0.021 inches (0.48-0.53 mm) for vertical or overhead applications and fan tip spray size of 0.024-0.031 inches (0.61-0.79 mm) for flatwork applications.

Alternate spray system: Use an agricultural sprayer using an approximate 5 gallons per minute (18.93 liters per minute) diaphragm pump and fan tip spray size of 0.30-0.60 gallons per minute (1.14-2.27 liters per minute) for vertical or overhead applications and fan tip spray size of 0.50-1.0 gallons per minute (1.89-3.79 liters per minute) for flatwork applications. A backpack or Hudson type sprayer should be used if only applying one bucket or fewer of material.

### Recommended Application Method

**Important:** Spray in a 50% overlapping pattern.

For slab applications, hold wand perpendicular to the surface and spray 6 inches (15 cm) from the surface. Apply product using the prescribed application rate for the area. If pooling or dry areas are observed while applying, use a broom to distribute material so that the product remains uniform throughout the application area. Do not allow excess material to dry on the slab. Remove excess P3 Marine product with a foam squeegee, broom, wet vac, or mop.

**Note:** Product not removed from the slab may become slippery in a wet condition.

Treated area can be opened to foot traffic one hour after treatment and all heavy equipment traffic 24 hours after treatment.

For vertical and overhead applications, hold sprayer wand perpendicular to the surface and spray 6 inches (15 cm) from the surface. Very light and repeated spray passes should be made over the same area using the prescribed application rate. For vertical application, begin at the bottom and go to the top.

### Time of Placement

P3 Marine can be used at the time of placement. Application should be performed after final troweling has been completed and concrete can take foot traffic without damage. Final concrete finish must be unburnished prior to application.

### Concrete Finish

The concrete surface finish is a key part of the P3 Marine application process. The surface finish should be discussed with the concrete foreman and the superintendent prior to concrete placement. The surface, if hard troweled, should be finished in an open fashion (unburnished), avoiding a burnished or black surface finish. P3 Marine needs a porous (open-matte) finish to penetrate into the concrete and perform as intended. SCP recommends observing the concrete finishers during the finishing process to ensure the concrete is not burnished.

P3 Marine can be applied to hand finished surfaces, broom finished surfaces, and bull floated surfaces.

**Note:** Extra time may need to be allowed for concrete to set on broom finished surfaces to ensure no damage to concrete from foot traffic.


### Formed Surfaces

SCP recommends using a reactive, non-petroleum based form release. Use the form release based on the manufacturer's recommendations.

Prior to application of SCP products onto any formed concrete surface, SCP recommends performing a water absorption test to determine if the product will be able to penetrate into the concrete surface.

### Accelerators

Accelerators are often used during colder months to accelerate the setting of the concrete. These admixtures will also accelerate the action of P3 Marine. If these admixtures are used (check batch tickets), applicators should test a small area prior to a full application. Tests should be conducted periodically. A test section measuring approximately 3 ft x 3 ft (0.914 m x 0.914 m) is recommended. Apply P3 Marine product to this area and wait 15 minutes. If the P3 Marine product begins to appear milky and turns into a gel or feels very slippery, then the accelerator is still active. Re-test until the product remains unchanged from its normal consistency. Once the SCP product remains unchanged on a test area for a minimum of 15 minutes, full application can begin.

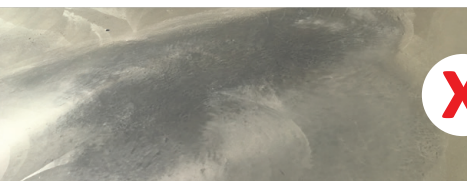

### Existing Concrete

The concrete surface needs to be structurally sound. If there are any concerns, consult with an engineer on the project or consult with a structural engineer. Any weak or degraded concrete surface or concrete exhibiting signs of scaling, delamination, or spalling must be mechanically removed to achieve a solid substrate. The concrete should be free of contaminants such as dirt, wax, oil, grease, curing compounds, adhesives, paint, or any other material that could prohibit P3 Marine from entering the concrete matrix. Always perform a water absorption test to determine if the product will be able to penetrate into the concrete surface.

### Admixtures

The use of moisture vapor reducing admixtures (MVRA), integral waterproofing admixtures, or latex admixtures **should not be used** when utilizing P3 Marine spray-applied technology.

### Typically Applied Concrete Products

There are many concrete additives on the market. Some of these will work in conjunction with P3 Marine, some will not.

If a monomolecular evaporation retarder (MMER) is used on the concrete, the MMER should be applied in accordance with the manufacturer's recommendations.

When specified, curing compounds (ASTM C309 or ASTM C1315 products) can be used but should only be used after the P3 Marine product application. If a curing compound is used prior to the P3 Marine product application, remove the curing compound prior to treatment.

## ENVIRONMENTAL CONDITIONS

### Hot Weather

One of the challenges of hot weather applications is rapid evaporation and unwanted gelling. SCP recommends pre-wetting concrete when surface temperature is above 90°F (32.2°C). Pre-wetting consists of spraying a light coat of water directly in front of P3 Marine product application. This process helps in preventing rapid evaporation of P3 Marine from the surface of the slab, allowing for better penetration into the hot concrete. P3 Marine should be removed before allowing to dry on the slab.

### Cold Weather

Challenges faced during cold weather applications include low temperature application, accelerator addition, and shorter days. The minimum air and concrete temperature at which P3 Marine can be applied is 35°F (1.7°C) and rising. If an accelerator is used in the concrete mix, test a small area as described in the [Accelerators section](#) of this document. With shorter days during the winter months, longer set times could push P3 Marine application to a later time when temperatures are too cold. Application may need to take place the following morning. If this is the case, the concrete company may need to protect the concrete with blankets or other means.

### Rain Event

A rain event is defined as liquid precipitation that is sufficient enough to cause standing water on the concrete structure. If a light mist is observed that causes no standing water, this is not considered a rain event and application does not require interruption.

If a rain event begins during an application, the portion of the slab that has been treated and squeegeed off is considered treated. If a portion of the slab is being treated and not squeegeed when it rains, P3 Marine will need to be reapplied after rain has stopped. Mark the area last treated so that you have a reference on where to resume application after the rain event. After rain has stopped, the slab should be squeegeed to remove all standing water. Application can continue as normal, beginning after the last treated section of the slab.



## POST-APPLICATION

### Traffic

Foot traffic is allowed one hour after application. Equipment traffic is allowed after 24 hours or when the design professional decides the concrete is strong enough to handle the load.

### Control Joints

SCP requests that control joints are cut **after** P3 Marine has been applied. If the control joints are cut prior to the placement of P3 Marine, the area will need to be cleaned to remove the residue dust from the cutting. ***P3 Marine can react with the dust creating a slick surface.***

## NOTES

- » ***Not suitable*** for use where coatings, coverings, or flooring may be applied.
- » Like fresh concrete itself and other alkaline materials, product may etch glass, shiny aluminum, and brass if left to dry on the surface. Simply remove while wet.
- » DO NOT apply on frozen substrate.

### Packaging/Storage

P3 Marine is packaged in 5, 55, and 275 gallons. Product shall ideally be stored in a location that is dry and between 35°-100°F (2°-38°C) ambient temperature. Optimal storage is at the middle of the temperature range. Protect from freezing and direct sunlight. 5-year shelf life under proper storage conditions.

### General Information

For safe handling information on this product, see the Safety Data Sheet (SDS).

### Warranty

SCP warrants the product to be free from material defects provided that the product was sold within its identified shelf life and stored according to guidelines on product packaging. SCP's sole liability shall be limited to the purchase price paid by the customer for SCP product for the quantity of defective material.

Mock-ups, testing, or sample applications to determine fitness of products for a particular use are the responsibility of the user. In-house and independent testing supports the instructions and claims made in this document. Due to the variation in job conditions, surface preparations, concrete substrates, and application methods, SCP cannot ensure uniformity in product performance.

## PRODUCT ATTRIBUTES

### Color

Clear

### Odor

None

### Specific Gravity

1.10

### pH

11.5 +/-

### Flammability

0 (non-flammable)

### VOC/VOS Content

0.0 g/ml

### Clean-up Solvent

Water

### Environmental Impact

None/Neutral

### User Status

Friendly

# QUESTIONS?

423.305.6151  
 [SCPTech@spraylock.com](mailto:SCPTech@spraylock.com)

**NOTE TO SPECIFIER:** Be sure to obtain the latest version of this Guide Specification.

This Guide Specification is not a completed document ready for use. It must be edited (i.e., deleting, adding, or modifying text) as required to suit project requirements.

The design professional and the contracting parties of the Contract Documents are responsible for the accuracy of issued project specifications, including use of this SCP™ Guide Specification.

Contact SCP™ for instructions for other applications not included in this specification.

**SCP™ (SPRAY-LOCK CONCRETE PROTECTION™) SHALL NOT BE LIABLE FOR DAMAGES ARISING OUT OF THE USE OF THIS GUIDE**

**CSI 3-PART SHORT-FORM GUIDE SPECIFICATION**

**EDIT TO SUIT PROJECT REQUIREMENTS**

## **SECTION**

### **SCP™ SPRAY-APPLIED COLLOIDAL SILICA CONCRETE TREATMENTS**

#### **PART 1 - GENERAL**

##### **1.1 SUMMARY**

- A. Section includes SCP™ spray-applied, penetrating, colloidal silica concrete treatments and substrate protection, applied after finishing for new and existing concrete for use in areas where the concrete member is exposed to migration and diffusion of chlorides from saltwater, splash zones, potential liquid contaminants under hydrostatic pressure, regular and consistent exposure to detrimental conditions, or other similar severe sources of attack mechanisms.

##### **1.2 PRE-POUR/ PREINSTALLATION MEETINGS**

- A. Pre-pour/ preinstallation meeting: SCP™ personnel or approved representative should be in attendance, in-person or by phone, at the pre-pour/ preinstallation meeting for concrete placement to discuss the requirements for concrete member preparation and product application.

##### **1.3 SUBMITTALS**

- A. Product Data: For each type of product.

#### **1.4 QUALITY ASSURANCE**

- A. Material Requirements: Concrete mixes need to be Portland cement based and designed in accordance with ACI and ASTM requirements.
- B. Manufacturer Qualifications: ISO 9001 Certified Manufacturer with a minimum 5 years' experience and capable of providing field service representation.

#### **1.5 DELIVERY, STORAGE, AND HANDLING**

- A. Delivery, storage, and handling shall be according to the manufacturer's written recommendations, industry guidelines, and/or Division 01 requirements whichever is more stringent.

#### **1.6 FIELD CONDITIONS**

- A. Environmental Requirements per manufacturer's written recommendations, Division 01, and as follows:
  - 1. Allow surfaces to attain a temperature of 35 deg F (1.7 deg C) and rising before proceeding with product application.
  - 2. Product should not be allowed to freeze.
  - 3. Protect application surfaces during periods of exposure to high winds.
  - 4. Surfaces to be treated should not be frozen or have frost on them. In addition, standing water should be removed prior to treatment.
  - 5. Surfaces over 90 deg F and Direct Sunlight Conditions: Spray a fine mist of water on the surface before the application of SCP™ treatment to help alleviate premature chemical reaction and/or drying from taking place prior to achieving maximum penetration.

### **PART 2 - PRODUCTS**

#### **2.1 PERFORMANCE REQUIREMENTS**

- A. SCP™ Spray-Applied Penetrating Colloidal Silica Concrete Treatment Performance:
  - 1. ASTM C 1556 Standard Test Method for Determining the Apparent Chloride Diffusion Coefficient of Cementitious Mixtures by Bulk Diffusion: Treated, normal strength concrete typically provides at least a 30% reduction of chloride diffusion from untreated concrete.
  - 2. NT 492 nordtest method Concrete, Mortar and Cement-Based Repair Materials: Chloride Migration Coefficient From Non-Steady-State Migration Experiments: Treated, normal strength concrete typically provides at least a 20% reduction of chloride migration from untreated concrete.
  - 3. EN 12390-8 Testing hardened concrete: Depth of penetration of water under pressure: Treated, normal strength concrete typically provides at least a 70% reduction of penetration from untreated concrete.
  - 4. ASTM C 1803 Standard Guide for Abrasion Resistance of Mortar Surfaces Using a Rotary Platform Abraser: Treated, normal strength concrete typically provides at least a 40% reduction in abrasion loss from untreated concrete.

**NOTE TO SPECIFIER:** Retain or revise paragraph and subparagraphs below for USGBC LEED v4 requirements.

- B. Low-Emitting Materials:
  - 1. General Emissions Evaluation: Building products shall be tested and determined compliant according to California Department of Public Health (CDPH) Standard Method v1.1–2010, using the applicable exposure scenario.

## **2.2 MANUFACTURERS**

- A. Manufacturers: Subject to compliance with requirements, provide spray-applied products by Spray-Lock Concrete Protection, LLC, 5959 Shallowford Road, Suite 405, Chattanooga, TN 37421; (office) 423.305.6151 / (fax) 423.305.6150; [www.concreteprotection.com](http://www.concreteprotection.com)
- B. SCP™ penetrating colloidal silica concrete treatments shall conform to the information provided in the most current product data sheet supplied by Spray-Lock Concrete Protection.

## **2.3 ACCESSORIES**

- A. Large Surface Areas and/or Volumes: Low-pressure, high-volume sprayer less than 100 psi (0.69 MPa), or medium-pressure airless sprayer less than 500 psi (3.4 MPa). Please refer to the manufacturers Product Data Sheet for more information on sprayer requirements and additional equipment.
- B. Small to Medium Surface Areas and/or Volumes: Pump or backpack sprayer for areas under 1000 sq ft (9.3 sq m), or sprayers indicated for large surface areas above.

## **PART 3 - EXECUTION**

### **3.1 PREPARATION**

- A. Prepare according to SCP™'s written instructions.

### **3.2 APPLICATION**

- A. Apply using the SCP™'s written instructions.

**END OF SECTION**

### SECTION 1: Identification of the substance/mixture and of the company/undertaking

#### 1.1. Product identifier

Product name : P3 Marine  
Substance name : Amorphous Colloidal Silica

#### 1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Concrete treatment

#### 1.3. Details of the supplier of the safety data sheet

Spray-Lock, Inc.  
5959 Shallowford Road Suite 405  
Chattanooga, TN 37421 - USA  
T 423-305-6151  
[info@spraylock.com](mailto:info@spraylock.com)

#### 1.4. Emergency telephone number

Emergency number : +1 (423) 305-6151

### SECTION 2: Hazards identification

#### 2.1. Classification of the substance or mixture

##### GHS-US classification

Not classified

#### 2.2. Label elements

##### GHS-US labelling

No labelling applicable

#### 2.3. Other hazards

No additional information available

#### 2.4. Unknown acute toxicity (GHS US)

None.

### SECTION 3: Composition/information on ingredients

#### 3.1. Substance

Proprietary Formula

Name	Product identifier	%
Silicon Dioxide	(CAS No) 7631-86-9	< 50
Water	(CAS No) 7732-18-5	> 70

#### 3.2. Mixture

This mixture does not contain any substances to be mentioned according to Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

### SECTION 4: First aid measures

#### 4.1. Description of first aid measures

First-aid measures after inhalation : Move the affected person away from the contaminated area and into the fresh air.  
First-aid measures after skin contact : In case of contact, immediately flush skin with plenty of water. Remove contaminated clothing and shoes. Wash clothing before reuse. Call a physician if irritation develops and persists.  
First-aid measures after eye contact : In case of contact, immediately flush eyes with plenty of water. If easy to do, remove contact lenses, if worn.  
First-aid measures after ingestion : If swallowed, do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical advice/attention.

#### 4.2. Most important symptoms and effects, both acute and delayed

Symptoms/injuries after inhalation : Not a normal route of exposure.  
Symptoms/injuries after skin contact : May cause skin irritation.  
Symptoms/injuries after eye contact : May cause eye irritation.  
Symptoms/injuries after ingestion : Not a normal route of exposure.

#### 4.3. Indication of any immediate medical attention and special treatment needed

Symptoms may not appear immediately. In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).



# P<sup>3</sup> Marine

## Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

### SECTION 5: Firefighting measures

#### 5.1. Extinguishing media

Suitable extinguishing media : Powder, water spray, foam, carbon dioxide.  
Unsuitable extinguishing media : None known.

#### 5.2. Special hazards arising from the substance or mixture

Fire hazard : Not combustible.

#### 5.3. Advice for firefighters

Protection during firefighting : Keep upwind of fire. Wear full fire-fighting turn-out gear (full Bunker gear) and respiratory protection (SCBA).

### SECTION 6: Accidental release measures

#### 6.1. Personal precautions, protective equipment and emergency procedures

General measures : Use personal protection recommended in Section 8. Keep unnecessary personnel away from the release.

#### 6.2. Methods and material for containment and cleaning up

For containment : Stop leak, if possible without risk.  
Methods for cleaning up : Dilute spill directly with plenty of water and drain to sewer.

#### 6.3. Reference to other sections

See section 8 for further information on protective clothing and equipment and section 13 for advice on waste disposal.

### SECTION 7: Handling and storage

#### 7.1. Precautions for safe handling

Precautions for safe handling : Handle in accordance with good industrial hygiene and safety practice. When using do not eat, drink or smoke.  
Hygiene measures : Wash hands before eating, drinking, or smoking.

#### 7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Keep out of the reach of children. Keep container tightly closed. Protect from sunlight. Do not freeze. Store at temperatures between 2 °C (35 °F) and 38 °C (100 °F).

#### 7.3. Specific end use(s)

Not available.

### SECTION 8: Exposure controls/personal protection

#### 8.1. Control parameters

None

#### 8.2. Exposure controls

Appropriate engineering controls : Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapor, etc.) below recommended exposure limits.  
Personal protective equipment : Avoid all unnecessary exposure.  
Hand protection : None necessary under normal conditions of use. Wear gloves if handling large quantities.  
Eye protection : Wear eye protection.  
Skin and body protection : Wear suitable protective clothing.  
Respiratory protection : In case of inadequate ventilation wear respiratory protection.  
Environmental exposure controls : Maintain levels below Community environmental protection thresholds.  
Other information : Handle according to established industrial hygiene and safety practices.

### SECTION 9: Physical and chemical properties

#### 9.1. Information on basic physical and chemical properties

Physical state : Liquid  
Appearance : Translucent  
Color : Clear  
Odor : Odorless  
Odor threshold : Not applicable  
pH : 11.2 - 11.5  
Melting point : 0 °C (32 °F): Water / 1,713 °C (3,115 °F) Amorphous Silicon Dioxide

# P<sup>3</sup> Marine

## Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Freezing point	: 0 °C (32 °F): Water
Boiling point	: 100 °C (212 °F): Water
Flash point	: Not applicable
Relative evaporation rate (butylacetate=1)	: 0.3
Flammability (solid, gas)	: Not flammable
Explosive limits	: Not applicable
Explosive properties	: Not applicable
Oxidising properties	: Not applicable
Vapor pressure	: 3.1690 kPa @ 25°C (0.0313 iatm @ 77°F)
Relative density	: 1.10
Relative vapor density at 20 °C	: 1.73 x 10 <sup>-5</sup>
Solubility	: Not applicable
Partition coefficient: n-octanol/water	: Not applicable
Auto-ignition temperature	: Not applicable
Decomposition temperature	: > 2,000 °C
Viscosity, kinematic	: 24 cSt @ 25 °C (77 °F)
Viscosity, dynamic	: 26 cP @ 25 °C (77 °F)

### 9.2. Other information

No additional information available

## SECTION 10: Stability and reactivity

### 10.1. Reactivity

No dangerous reaction known under conditions of normal use.

### 10.2. Chemical stability

Stable under normal storage conditions.

### 10.3. Possibility of hazardous reactions

No dangerous reaction known under conditions of normal use.

### 10.4. Conditions to avoid

Heat. Incompatible materials.

### 10.5. Incompatible materials

Acids.

### 10.6. Hazardous decomposition products

Not applicable.

## SECTION 11: Toxicological information

### 11.1. Information on toxicological effects

Acute toxicity : Not classified.

P <sup>3</sup> Marine	
LD50 oral rat	No data available
LD50 dermal rabbit	No data available
LC50 inhalation rat	No data available

Skin corrosion/irritation	: Based on available data, the classification criteria are not met.
Serious eye damage/irritation	: Based on available data, the classification criteria are not met.
Respiratory or skin sensitisation	: Based on available data, the classification criteria are not met.
Germ cell mutagenicity	: Based on available data, the classification criteria are not met.
Carcinogenicity	: Based on available data, the classification criteria are not met.
Reproductive toxicity	: Based on available data, the classification criteria are not met.
Specific target organ toxicity (single exposure)	: Based on available data, the classification criteria are not met.
Specific target organ toxicity (repeated exposure)	: Based on available data, the classification criteria are not met.
Aspiration hazard	: Based on available data, the classification criteria are not met.

# P<sup>3</sup> Marine

## Safety Data Sheet

according to the Hazard Communication Standard (CFR29 1910.1200) HazCom 2012

Symptoms/injuries after inhalation	: Not a normal route of exposure.
Symptoms/injuries after skin contact	: May cause skin irritation.
Symptoms/injuries after eye contact	: May cause eye irritation.
Symptoms/injuries after ingestion	: Not a normal route of exposure.

### SECTION 12: Ecological information

#### 12.1. Toxicity

Ecology - general	: No known significant effects or critical hazards.
-------------------	---

#### 12.2. Persistence and degradability

##### P<sup>3</sup> Marine

Persistence and degradability	Not established.
-------------------------------	------------------

#### 12.3. Bioaccumulative potential

##### P<sup>3</sup> Marine

Bioaccumulative potential	Not established.
---------------------------	------------------

#### 12.4. Mobility in soil

No information available

#### 12.5. Other adverse effects

No information available

### SECTION 13: Disposal considerations

#### 13.1. Waste treatment methods

Waste disposal recommendations	: This material must be disposed of in accordance with all local, state, provincial, and federal regulations. This material is not subject to RCRA, EPCRA, CERCLA regulations.
--------------------------------	--

### SECTION 14: Transport information

#### Department of Transportation (DOT)

Not regulated for transport

#### Additional information

Other information	: No information available.
Special transport precautions	: Do not handle until all safety precautions have been read and understood.

### SECTION 15: Regulatory information

#### 15.1. US Federal regulations

All components of this product are listed, or excluded from listing, on the United States Environmental Protection Agency Toxic Substances Control Act (TSCA) inventory

#### 15.2. US State regulations

##### P<sup>3</sup> Marine

State or local regulations	This product does not contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.
----------------------------	--

### SECTION 16: Other information

Date of issue	: 03/18/2020
Revision date	: 02/12/2021
Other information	: None.

*Disclaimer: We believe the statements, technical information and recommendations contained herein are reliable, but they are given without warranty or guarantee of any kind. The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for the user's own particular use.*

31-SDS-P<sup>3</sup> Marine  
Date: 02/12/2021  
Rev.: 1.2

# Spray-Lock Concrete Protection®

## P3 Marine Limited Warranty

Rev. Rel. 04/08/2020

### Limited Warranty

SCP hereby states that P3 Marine satisfactorily meets all its required ISO 9001 quality control requirements. SCP will warrant P3 Marine for a period of ten (10) years from date of substantial completion of the project. This warranty is void if SCP's application instructions or any other technical information stipulated in SCP's documentation were not strictly followed.

This warranty is subject to the limitations of the conditions listed below:

1. The recipient of the limited warranty must provide SCP a written notice within thirty (30) days after the discovery of a defect in the SCP products for this limited warranty. Claims shall be addressed to 5959 Shallowford Road, Suite 405, Chattanooga, TN 37421, Attn: Technical Director. SCP must be allowed a reasonable opportunity within which to inspect property to which SCP products have been applied and to take core samples of the area for evaluation.
2. If SCP is satisfied that the warranty applies then SCP will, at SCP cost and option, and subject to the other terms of this warranty:
  - a. Replace the product supplied or re-supply the product;
  - b. Replacement product quantities will be based on the residual value of the product supplied by SCP. The actual amount of product to be supplied will be calculated on a sliding scale basis according to the time that has elapsed on the warranty. The amount to be supplied will be reduced by 20% for every 2 years that the warranty is in effect.
3. The cost of any site visit requested under a warranty claim- which does not reveal any problem relating to the warranty must be paid for, at SCP sole discretion, by the party requesting the inspection, including any core sample and testing. The party requesting the site visit will pay for the associated costs first; these will be reimbursed by SCP if the claim is valid.
4. Liability for the breach of warranty will not include for:
  - a. Any consequential loss
  - b. Any damage which arises after application of the product and which can be attributed to external causes or any other factor beyond the reasonable control of SCP, including but not limited to dynamic structural building movement, design defect, earth tremors, fire, flood or work conducted by other tradespersons affecting the waterproofed area or the failure of other roofing components such as drains, flashing materials, fasteners or labor skill shortfalls.
  - c. Discoloration or other damage to the surface effects if the product affecting only the aesthetic qualities of the product or surface appearance.
5. To the greatest extent permitted by law, this warranty is in lieu of all warranties express or implied. Seller disclaims all other warranties, expressed or implied, oral or written, including, without limitation, the implied warranties of merchantability and fitness for a particular purpose.
6. Liability for breach of any condition or warranty implied under the Trade Practices ACT (other than section 69) relating to products which are not of a kind ordinarily acquired for personal, domestic, or household use or consumption will, at SCP option be limited to the replacement or repair of the product supplied or payment of the cost of replacement of the product supplied.
7. This warranty only applies to the product if:
  - a. It is used in a proper and professional manner and is stored, handled and installed strictly in accordance with SCP current instructions for use and any written specifications published by SCP for its application;
  - b. The environment in which the product must perform has been properly characterized, is consistent with the requirements of the technical literature and will not change for the term of the warranty;
  - c. It is applied by the approved SCP applicator to a structurally sound and correctly prepared substrate and such substrate, together with surrounding or adjacent surfaces shall have remained stable and sound;
  - d. No other product or material has been added to or used in conjunction with the product, unless approved by SCP in writing;
  - e. It is allowed sufficient time to cure within the recommended period specified on SCP's current instructions for use;
  - f. SCP has received full payment for the product within payment terms;
  - g. Failure to follow the requirements of this warranty will void this warranty. Repairs should not begin until after evaluation has been completed by SCP.
  - h. The warranty shall be subjected to, construed under and enforced according to the laws of the State of Tennessee exclusive of its choice or conflicts of laws principles. Any action in regard hereto or arising out of the terms and conditions hereof shall be instituted and litigated in the courts of the state of Tennessee in Hamilton County, Tennessee or any federal court sitting therein and no other. In accordance herewith, the parties hereby submit to the jurisdiction and venue of such courts and waive any objection that such courts are an inconvenient forum. The parties hereby waive the right to a jury trial in any action, proceeding or counterclaim arising out of or related to this limited warranty. In no event shall SCP be liable for any special, incidental, consequential, or punitive damages, including loss of profits and use.